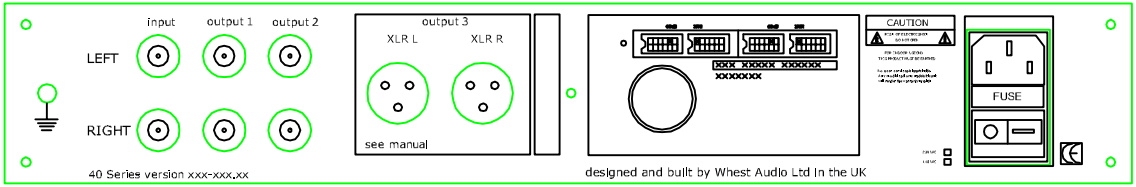

Unbalanced RCA output.
Connect to your computer, mixer
or headphone amplifier

Gain and Load switch values
showing setting
gain = 65dB and 100ohm =load

Unbalanced RCA input.
Connect to turntable

Unbalanced RCA output.
Connect to pre/ amplifier

Balanced XLR output connectors. Connect to pre/
amplifier ONLY when not using RCA

AC Power input. Use
Approved IEC cables only

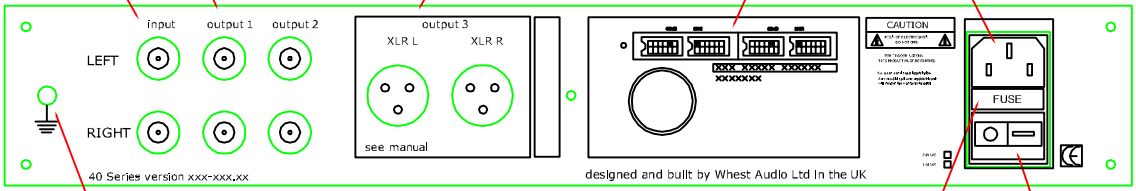

Turntable Audio
ground point.

20mm X 5mm FUSE.
1AT 230VAC (FOR 230VAC COUNTRIES)
2AT 230VAC (FOR 115V COUNTRIES)

POWER SWITCH

△	- -			
△	- -			
△	- -			
△	- -			
△	- -			

whest audio ltd

40 Series rear panel

Fig.1